

base SEALTABLE

Sealing Table with Integrated
Turning Mechanism



The double suction pad optimally secures the units during the sealing process. It is also possible to mount the single suction attachment required for sealing small units (see image). The equal height of the table and the transport section makes it easy to position and remove the units. The sealed glass panes are automatically lowered to the table level. The four telescoping brackets make it possible to seal larger insulating glass units as well.



Highlights

- Rotation can be set to 90°, 180° or 360°
- Potentiometer control for the rotating speed


LISEC

base SEALTABLE

Technical data



	SEALTABLE
Minimal size	230 x 180 mm
Maximum size	1,600 x 1,600 mm
Load max.	180 kg
Transport height horizontal	865 mm

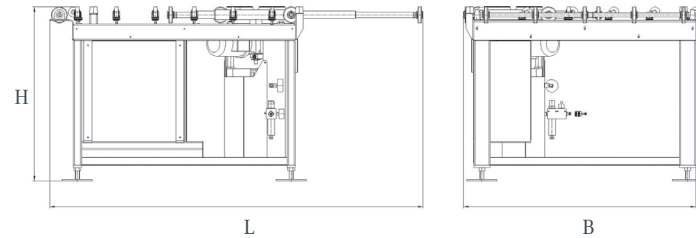

	L (mm)	B (mm)	H (mm)	Power consumption (kW)	Operating air pressure (bar)	Air consumption (l/min)	Weight (kg)
SEALTABLE	1,850	1,140	865	0.12	6	100	200